


The AW-D106A horn strobe with wireless transmitter is mainly designed to be use with fire alarm control panel, and the wireless device's info to the addressable panel is transmit through it. It also has the function of battery low-voltage alarm. The AW-D106A supports electronic coding, more suitable for application convenient.



Features

- ✓ Surface mounting
- ✓ Full electronic coding
- ✓ LED indicator
- ✓ Complete functional test with every activation
- ✓ Meets all requirements of latest EN54-3&EN54-23&EN54-25

Installation

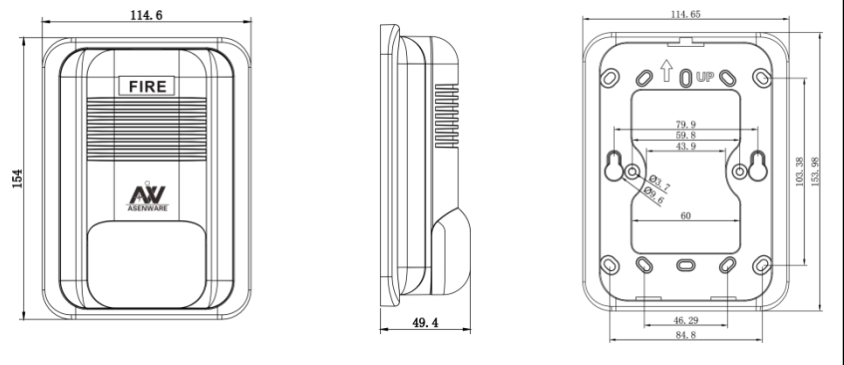

Technical Specification

Model	AW-D106A
Operating Voltage	Loop 24V
Operating current	standby status $\leq 3\text{mA}$, alarm status $\leq 60\text{mA}$
Operating Frequency	428MHz to 438MHz
Alarm SPL	$\geq 100\text{dB}$
Flash Period	1 Time/Sec
Protection class	IP30
Environmental	Temperature range: -5 to 40°C ($23\sim 104^{\circ}\text{F}$) Humidity: 5 to 95% RH, non-condensing
Materials and colors	ABS red
Application	For indoor use only
Mating Host	AW-FP100 addressable fire alarm control panel
Encoding	Address from 1 to 250 optional
Size	154mm* 115mm* 50.5mm
Weight	About 00g