

The AW-D121C is designed for Asenware all fire alarm system to provide auxiliary power when the external devices cannot be driven by the power from the panel, it has a battery backup for use in the event of an emergency power outage.


The conventional power supply box AW-D121C provides 24VDC output, rated current is 5A to drive external devices.



Features

- ✓ Standby battery
- ✓ High flexibility, flexible settings according to specific projects
- ✓ Complied with EN54-2 & EN54-4

Installation

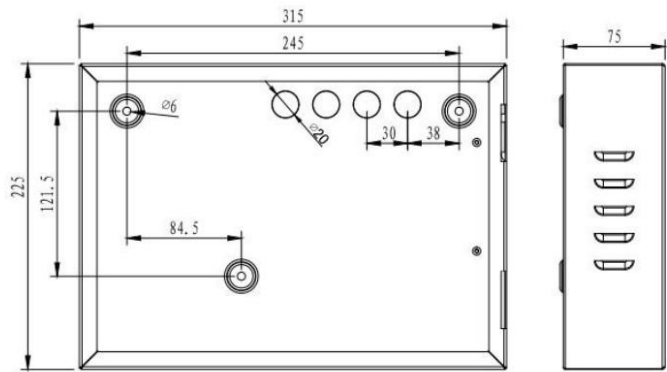

Technical Specification

Model	AW-D121C
Operating voltage	110VAC or 220VAC
Branch output current	5A
Protection level	IP30
Environmental	Temperature range: -10 to 50°C (14~122°F) Humidity: 5 to 95% RH, non-condensing
Mating host	Asenware all fire alarm control panel
Size (L*W*H)	315mm* 225mm* 75mm