When a fire alarm or fault occurs in the fire alarm system, the 4G GSM module AW-FP100GSM-4G will send this information to the designated person's mobile phone via SMS.

The GSM module can connected with Asenware AW-FP100 series fire alarm control panel ,conventional repeater and AW-GSM200 module.

## Features

- ✓ Support 4G network
- ✓ Use Nano SIM Card
- ✓ Use PDU format to send SMS, support multiple languages
- ✓ Use Qualcomm kernel, can be used in most parts of the world

## Installation

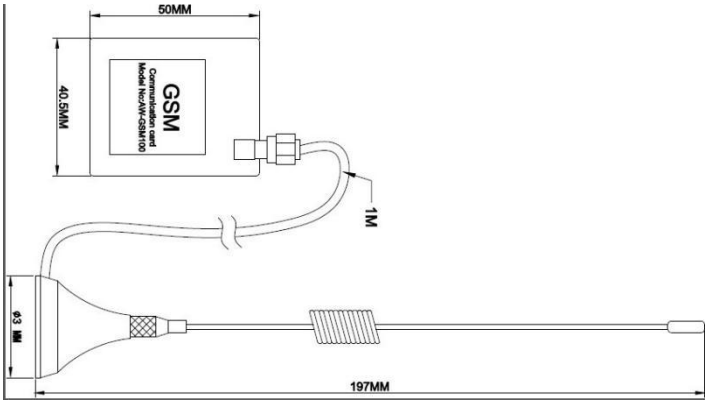


## Technical Specification

| | |
|---|---|
| Model | AW-FP100GSM-4G |
| Main Voltage | 5VDC |
| Operating Current(@ sleep mode) | ≤5mA |
| GSM Frequency | 850MHz/900MHz/1800MHz/1900MHz |
| Antenna bandwidth | 0.8GHz-3GHz |
| Antenna gain | 6 dBi |
| Antenna length | 200 mm |
| Feed line length | 1.0 m |
| Environmental | Temperature range: -5 to 40°C<br>Humidity: 5 to 95% RH, non-condensing |
| Size(L*W) | 50mm* 40.5mm |

*ASENWARE LTD*
*Zhongshan Guta Fire Equipment Technology CO.,Ltd*
*WEBSITE: www.asenware.com EMAIL: info@asenware.com*